



# DC FUSE DC 1500V


CERTIFICATE  
TUV CE





The product shell is injection molded technology, and injection molding is the most commonly used manufacturing process of manufacturing plastic parts. It can form a complex shape and detail, excellent surface finish, good dimension, high production efficiency, labor cost.



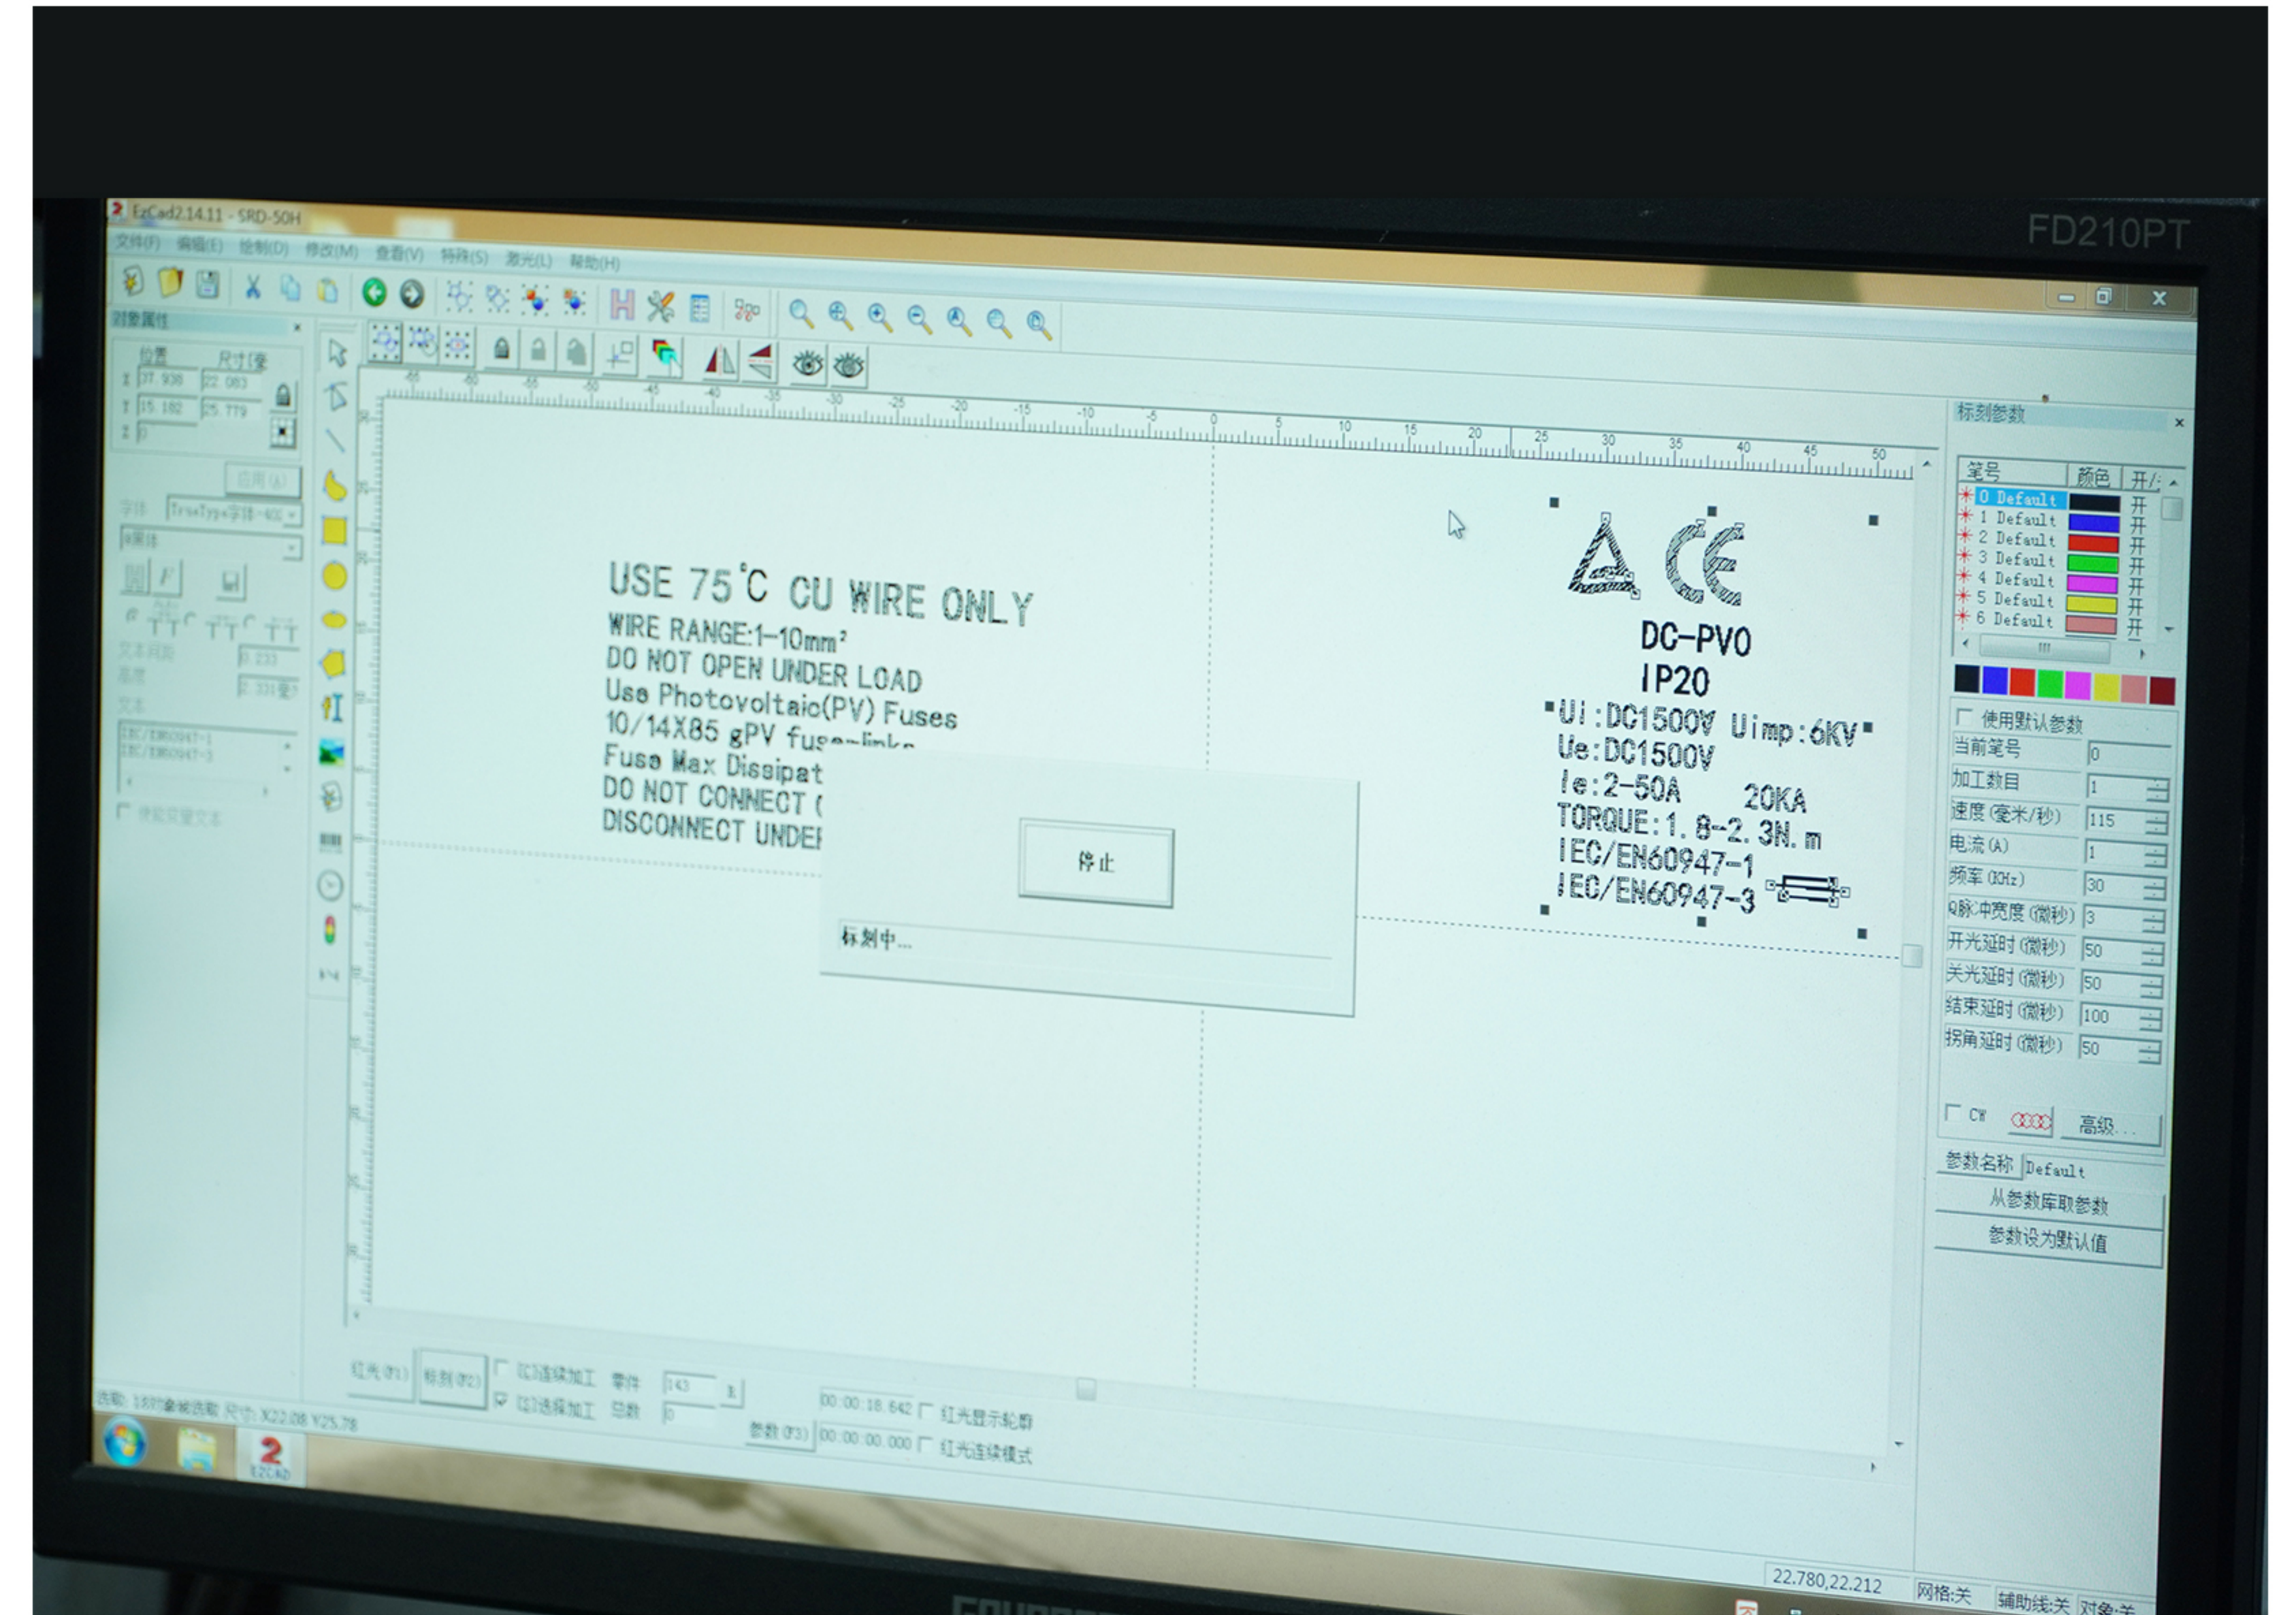


UV lasers Since the focus of focusing photosporns are small, they can make fine marking, but also have fast marking speed, less consumables, not easy to be erased, long life, stable performance, maintenance, etc.






### 960°C flame retardant test

The flame can be extinguished by itself with in 30 seconds after high-temperature combustion, no molten liquid drip from the product, and the cotton wool 30 cm below the product will not be ignited. It belongs to the **Vo** fire protection class.

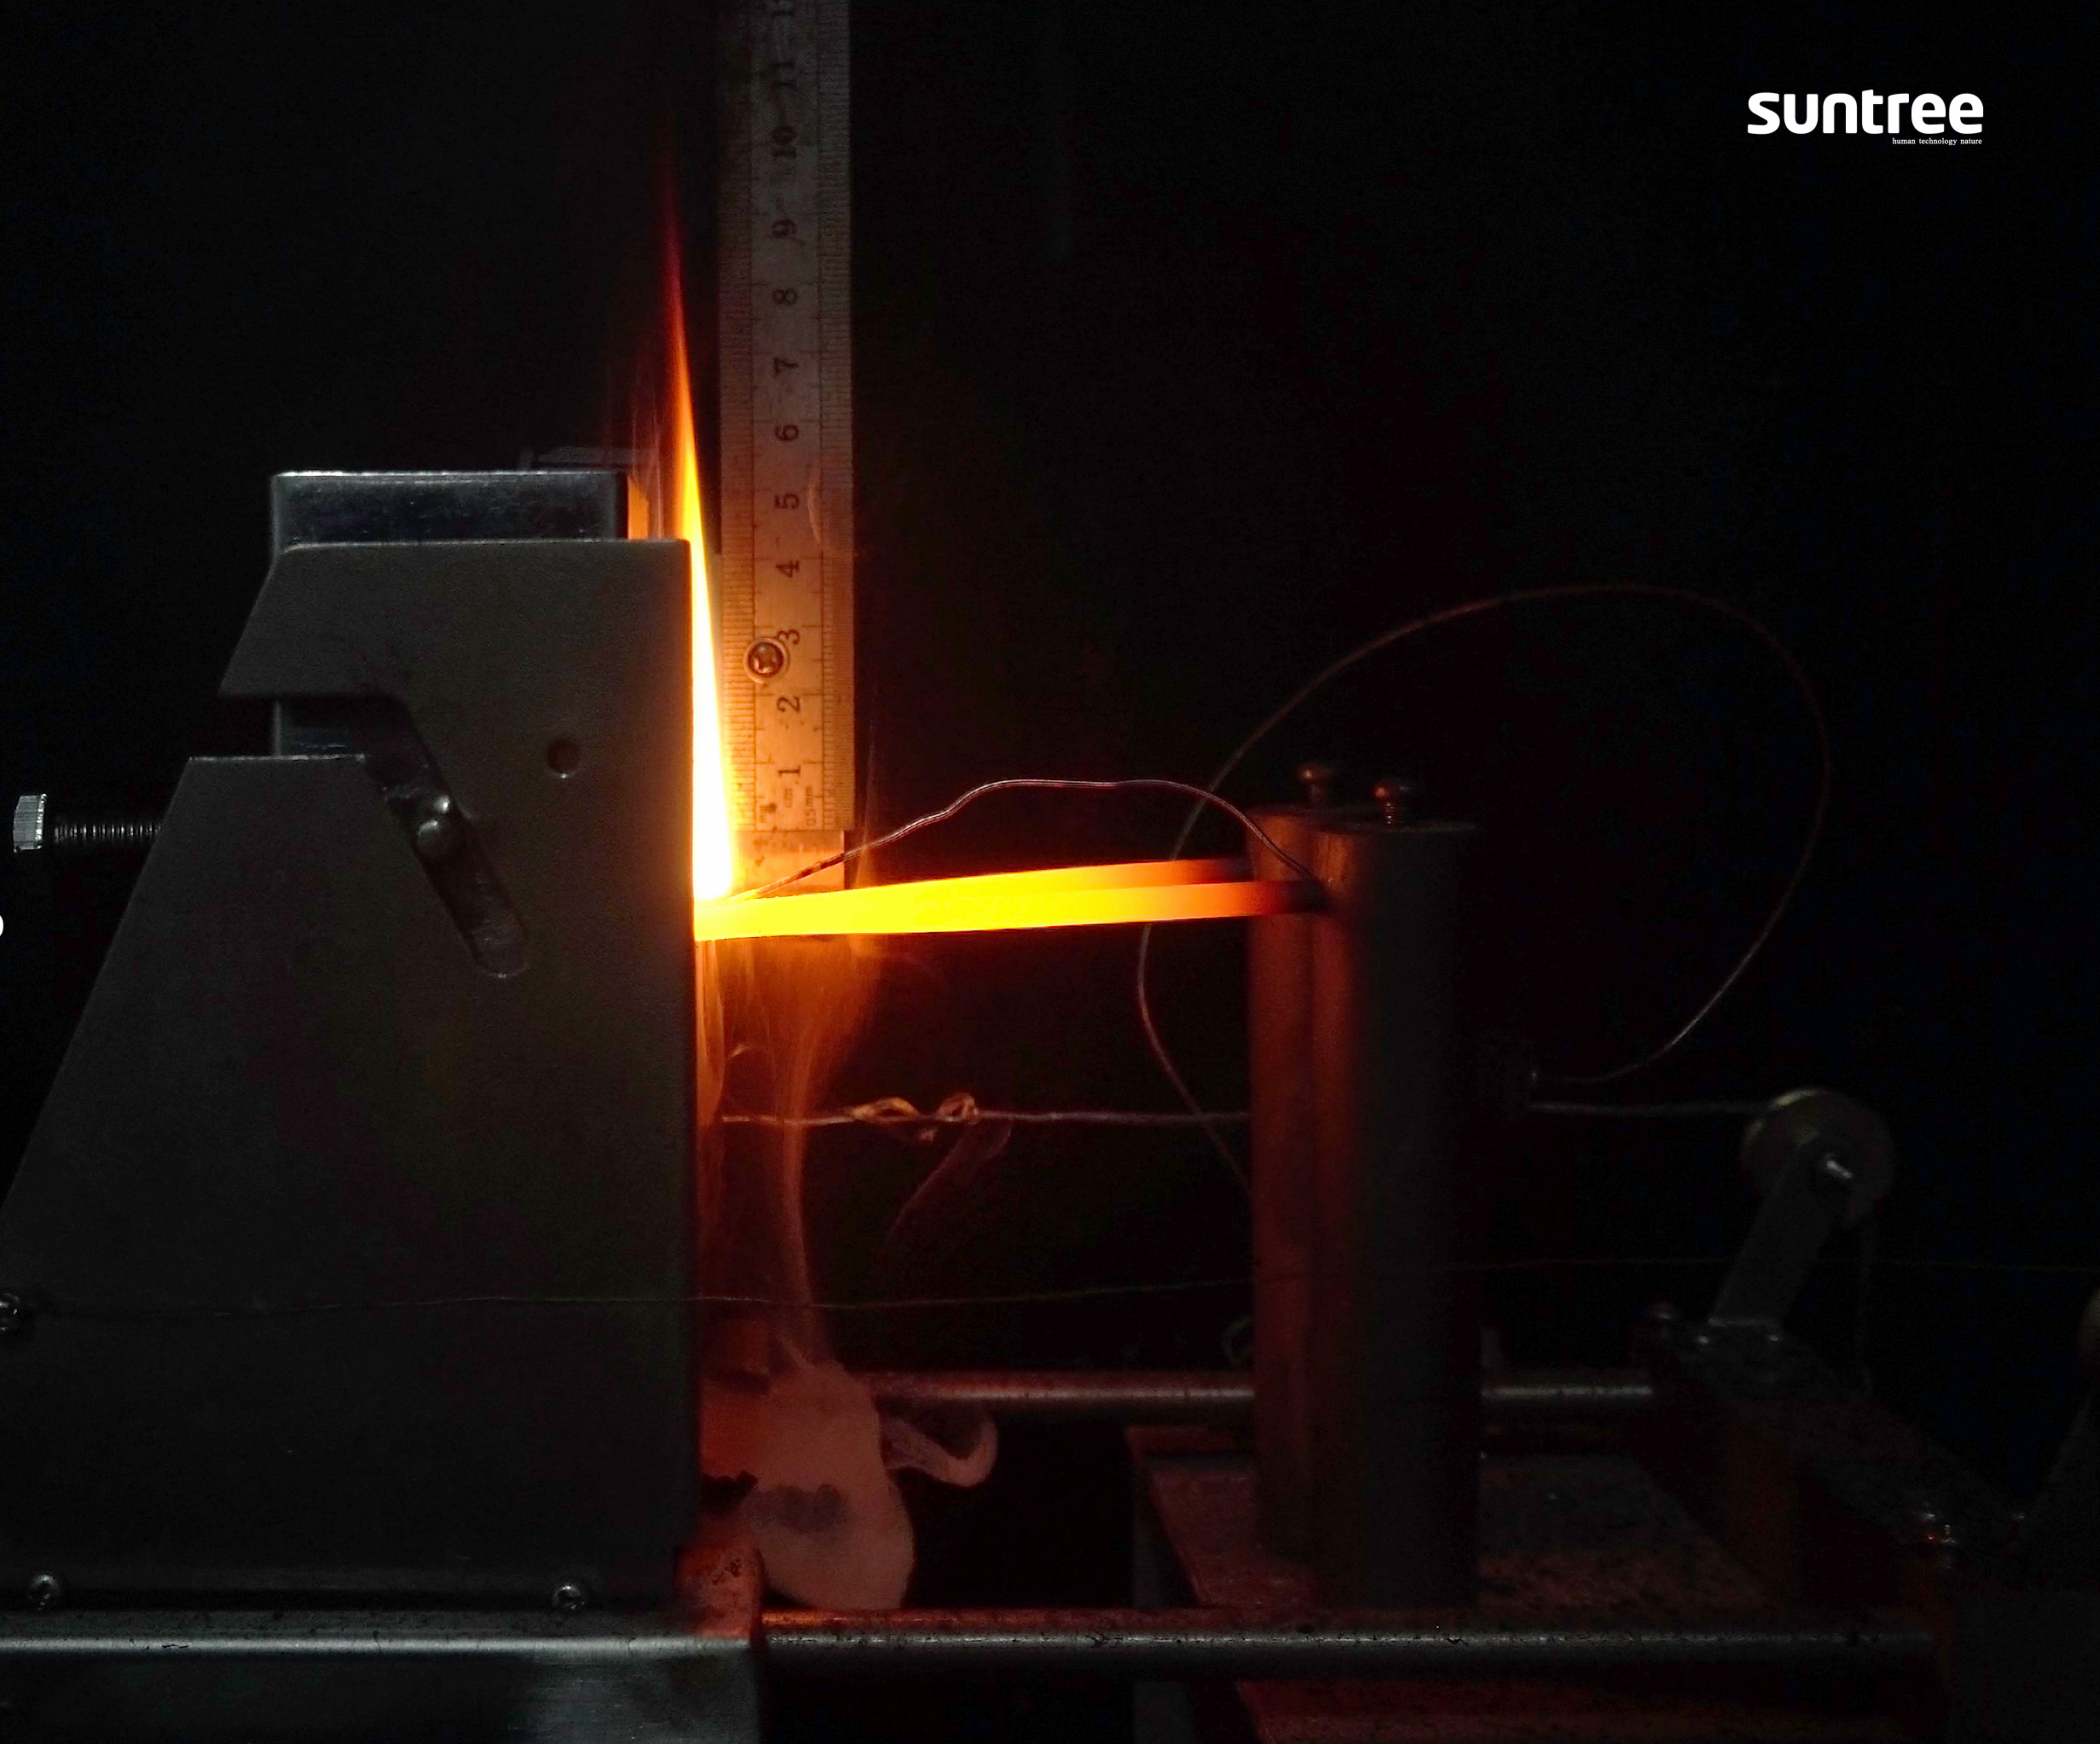



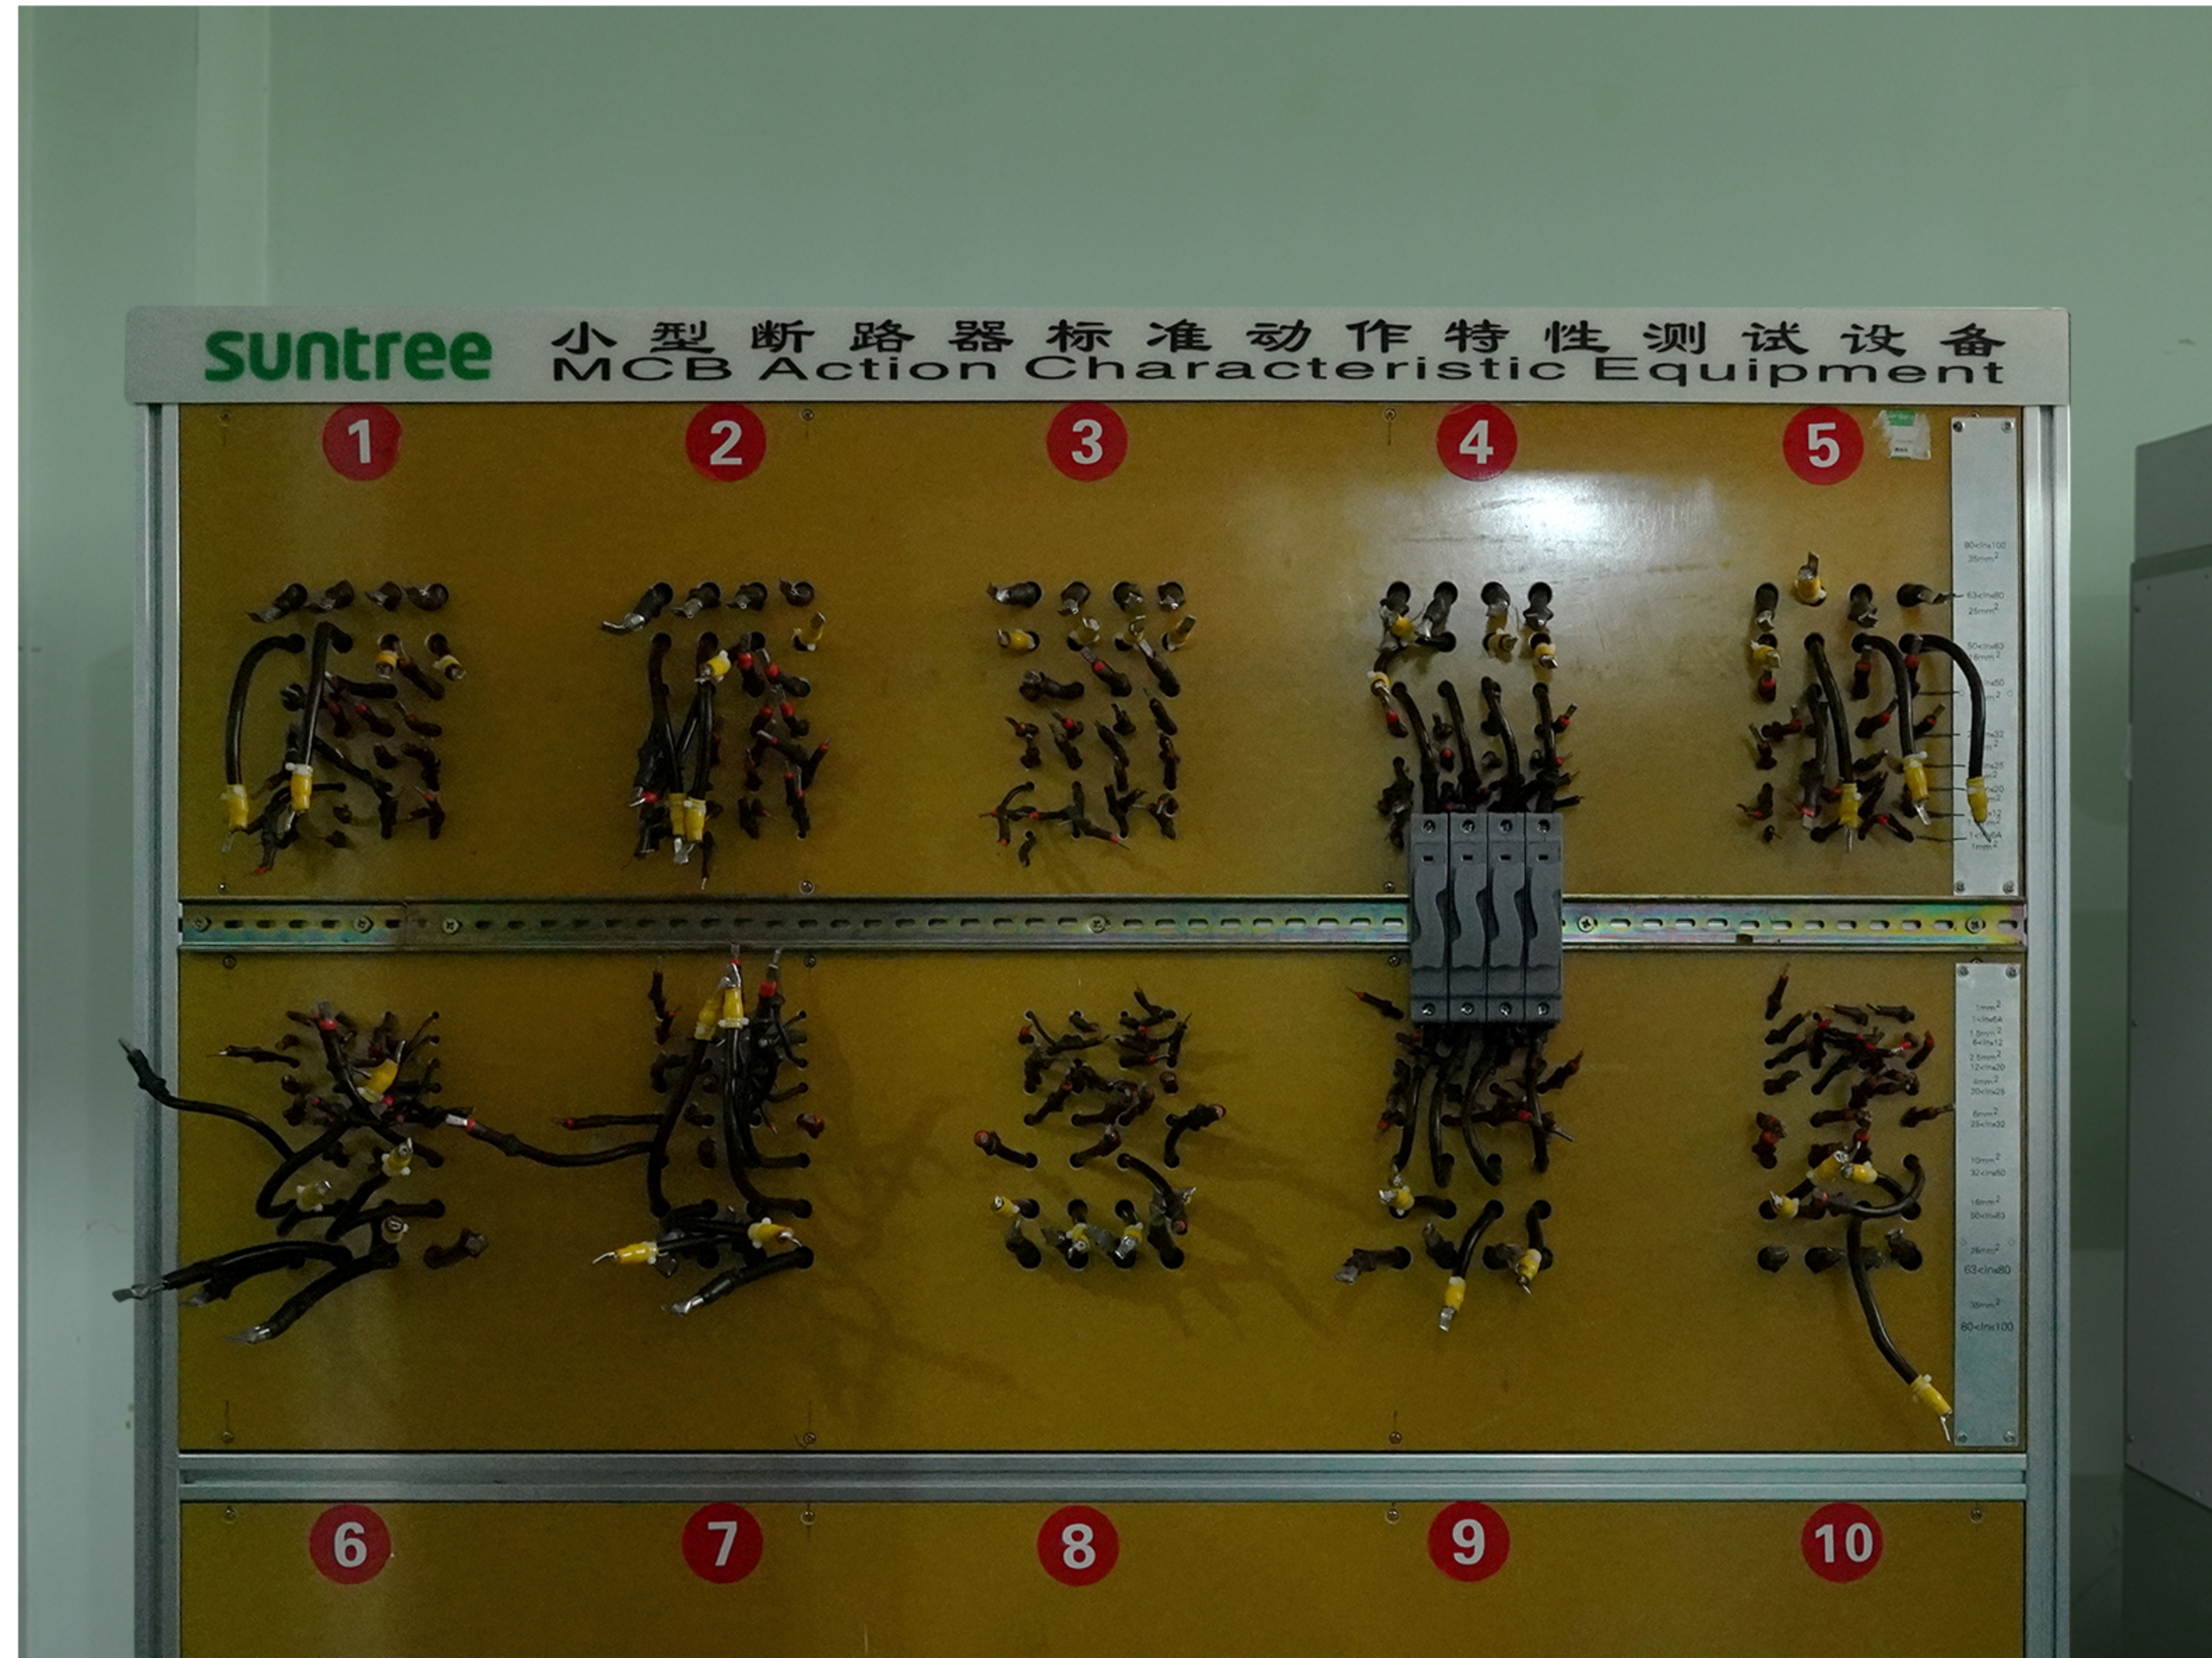

The temperature rise test is one of the important tests to ensure product safety and stability. Ambient temperature between 10 ~ 40 °, Terminal block temperature - ambient temperature is less than equal to 65K.



The standard long delay characteristic test mainly tests overload current. 1.13 times the rated current can not be disconnected within one hour below 63A, and under 1.45 times 63A, it will be disconnected within one hour






Place the product in the test box for 48 hours, set a high temperature of **85°C**, a humidity of **95%**, and a low temperature of **-30°C** to simulate whether the extreme environment affects the product.



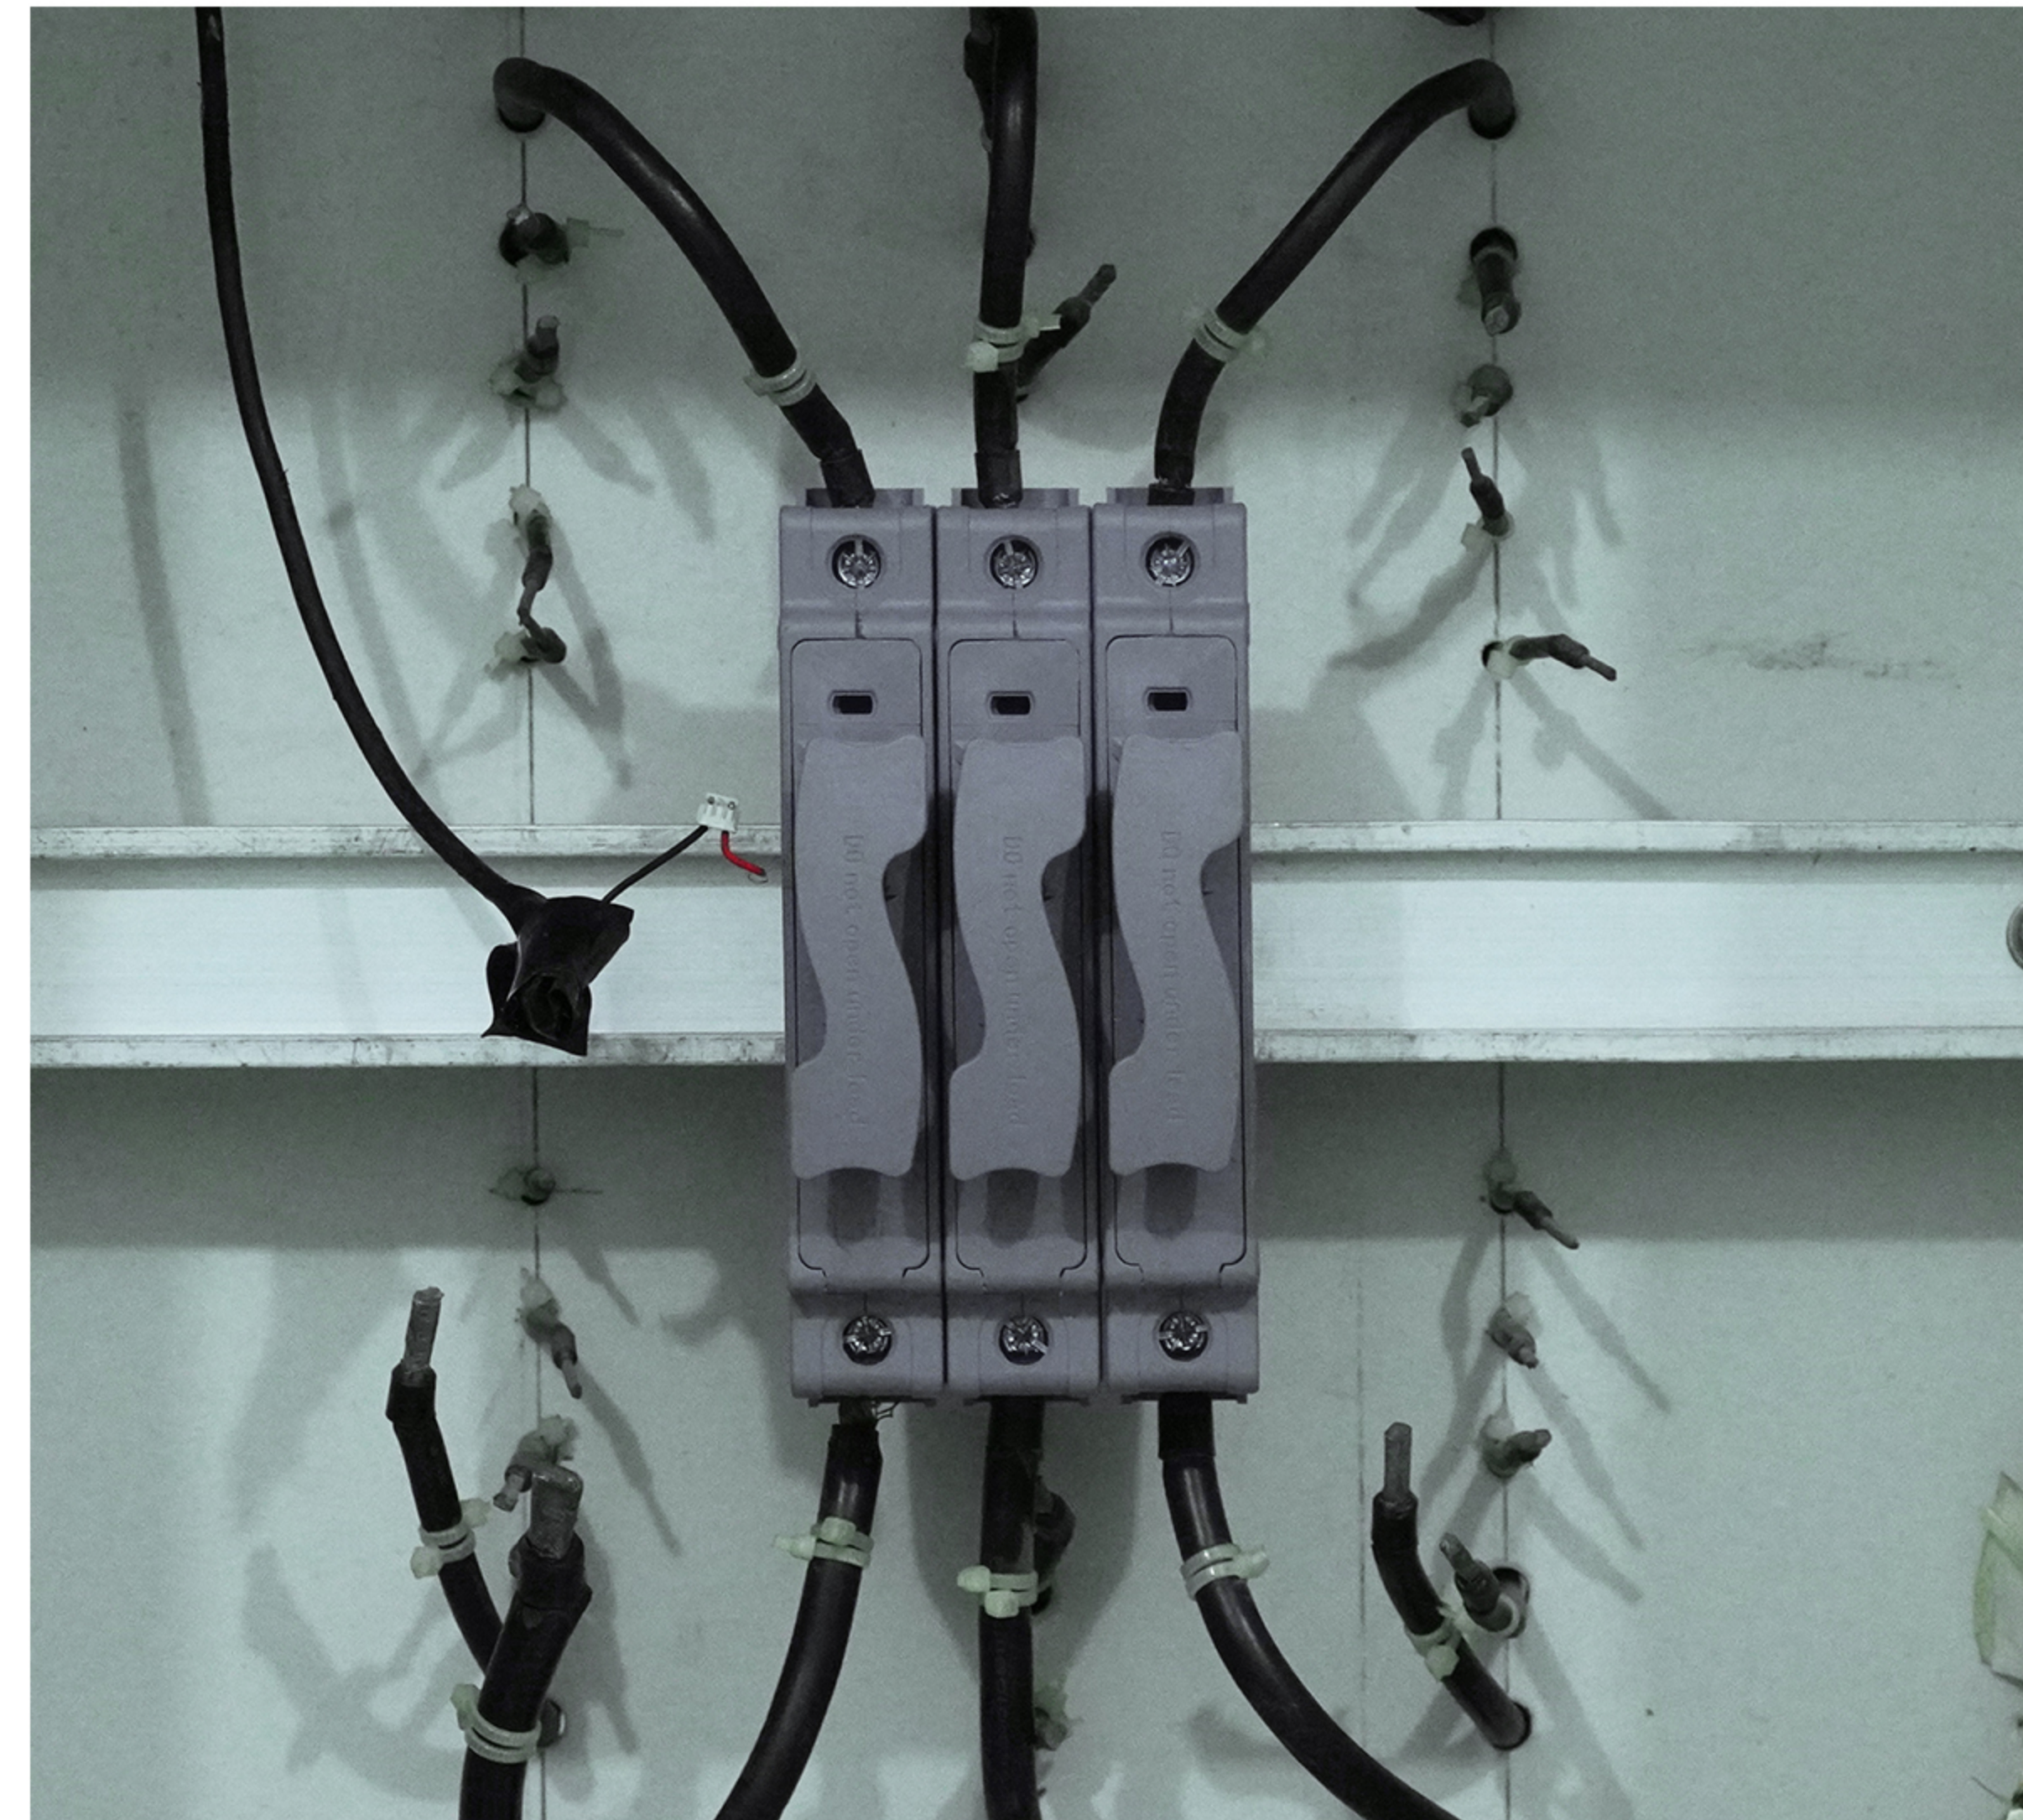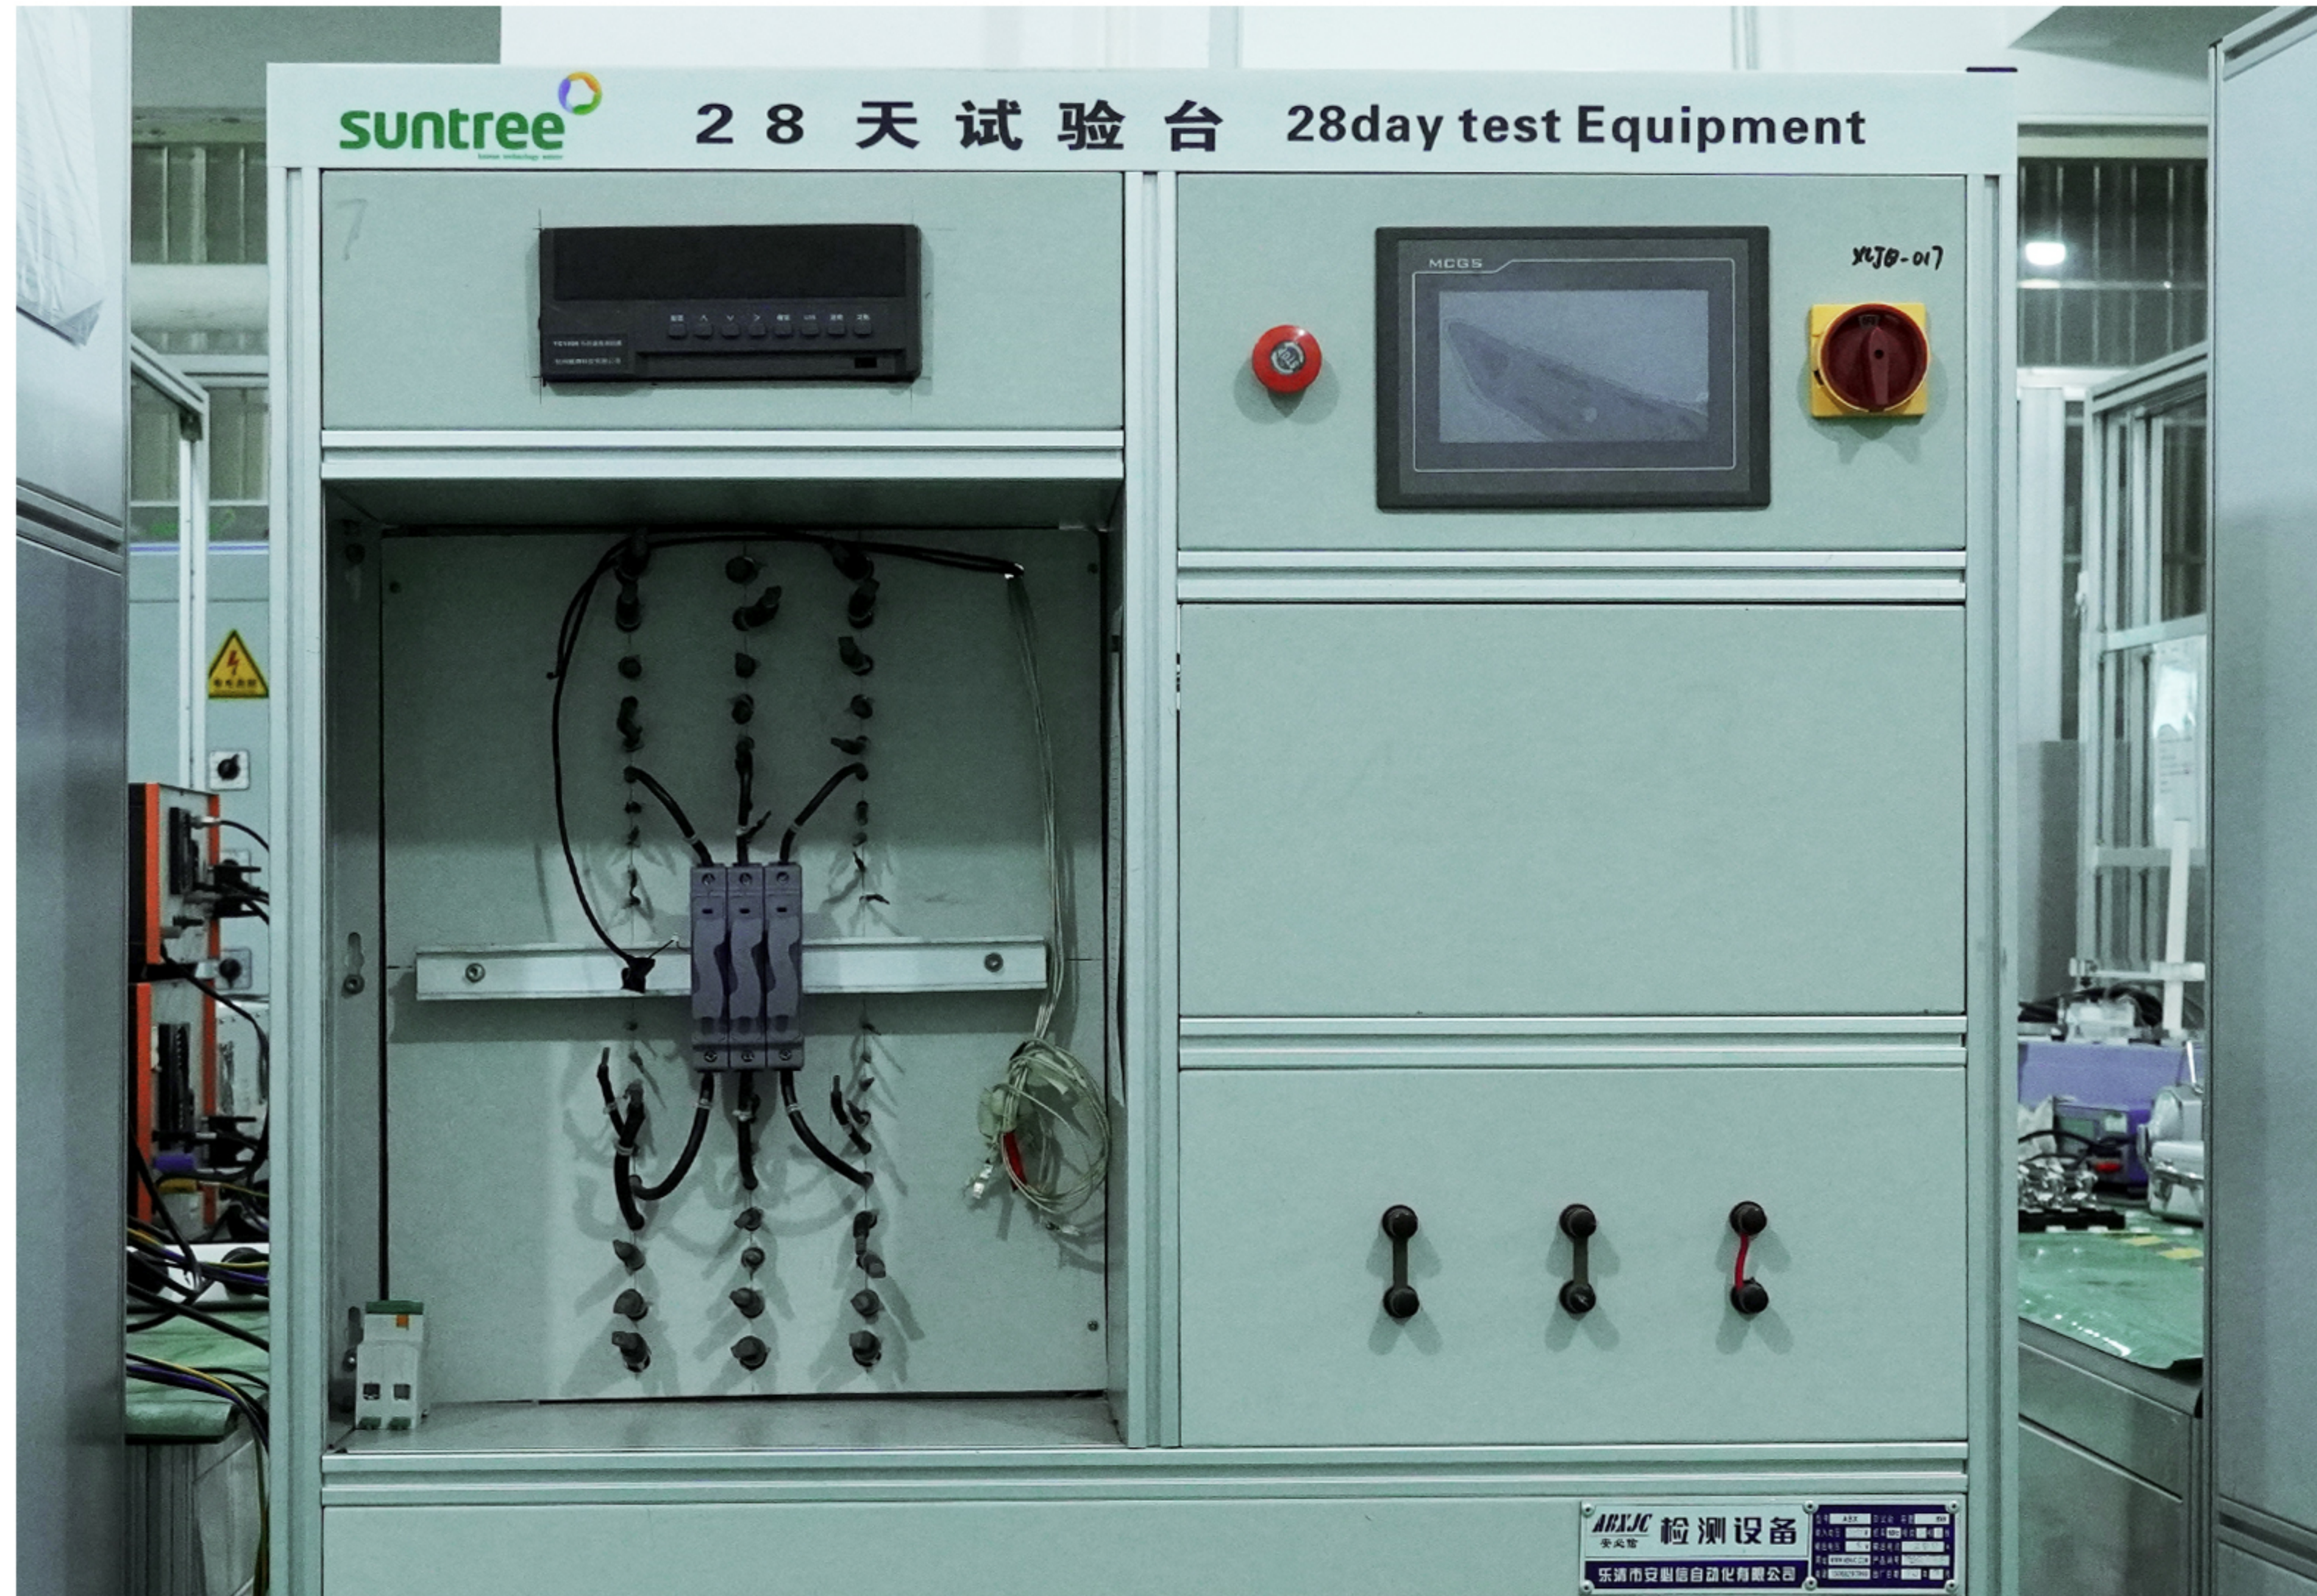

Through 28 days of actual simulation test, verify the reliability of the long-term operation of the fuse.




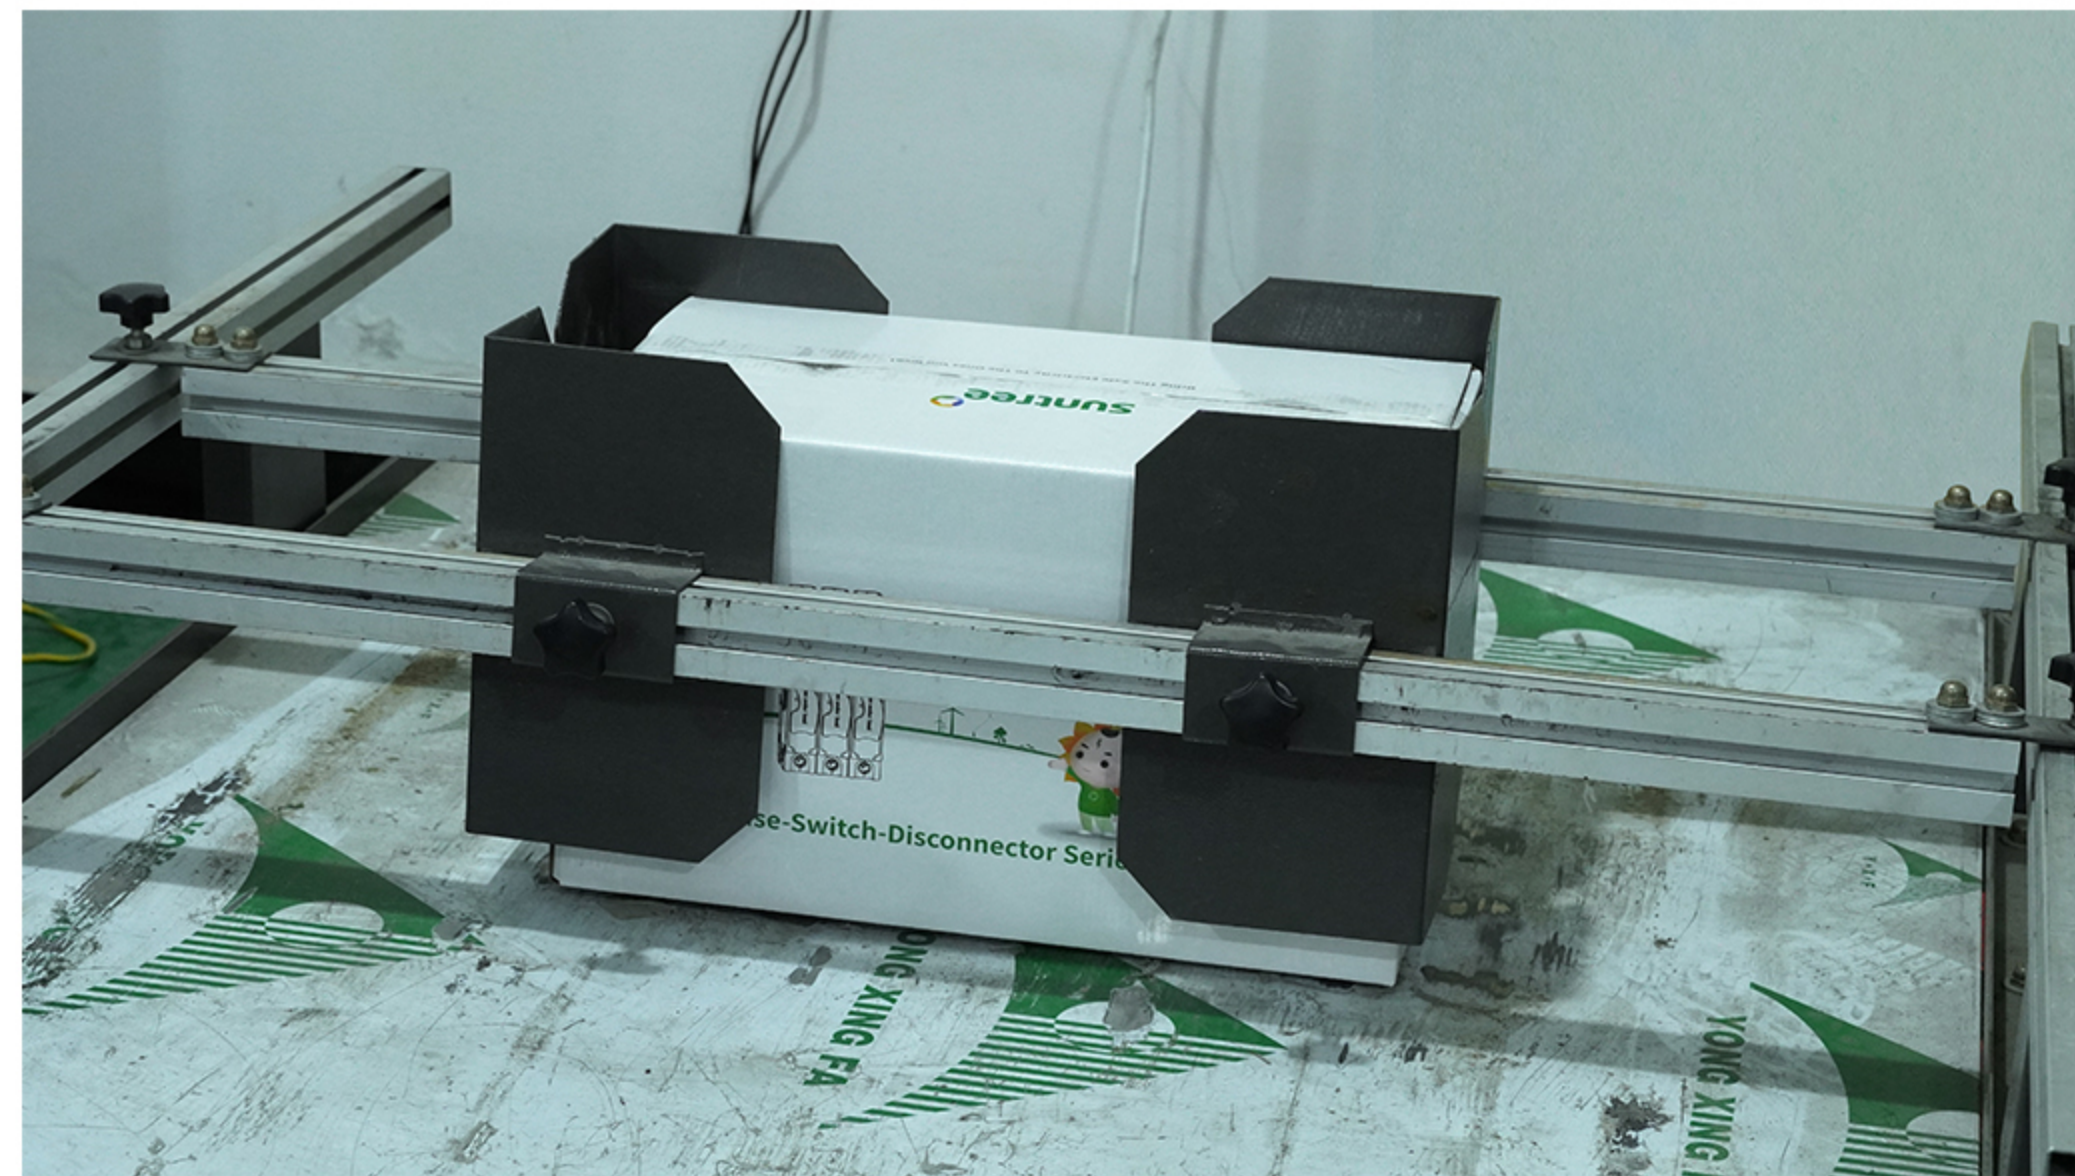


Shockproof

Anti-fall

Prevent product damage in transit.



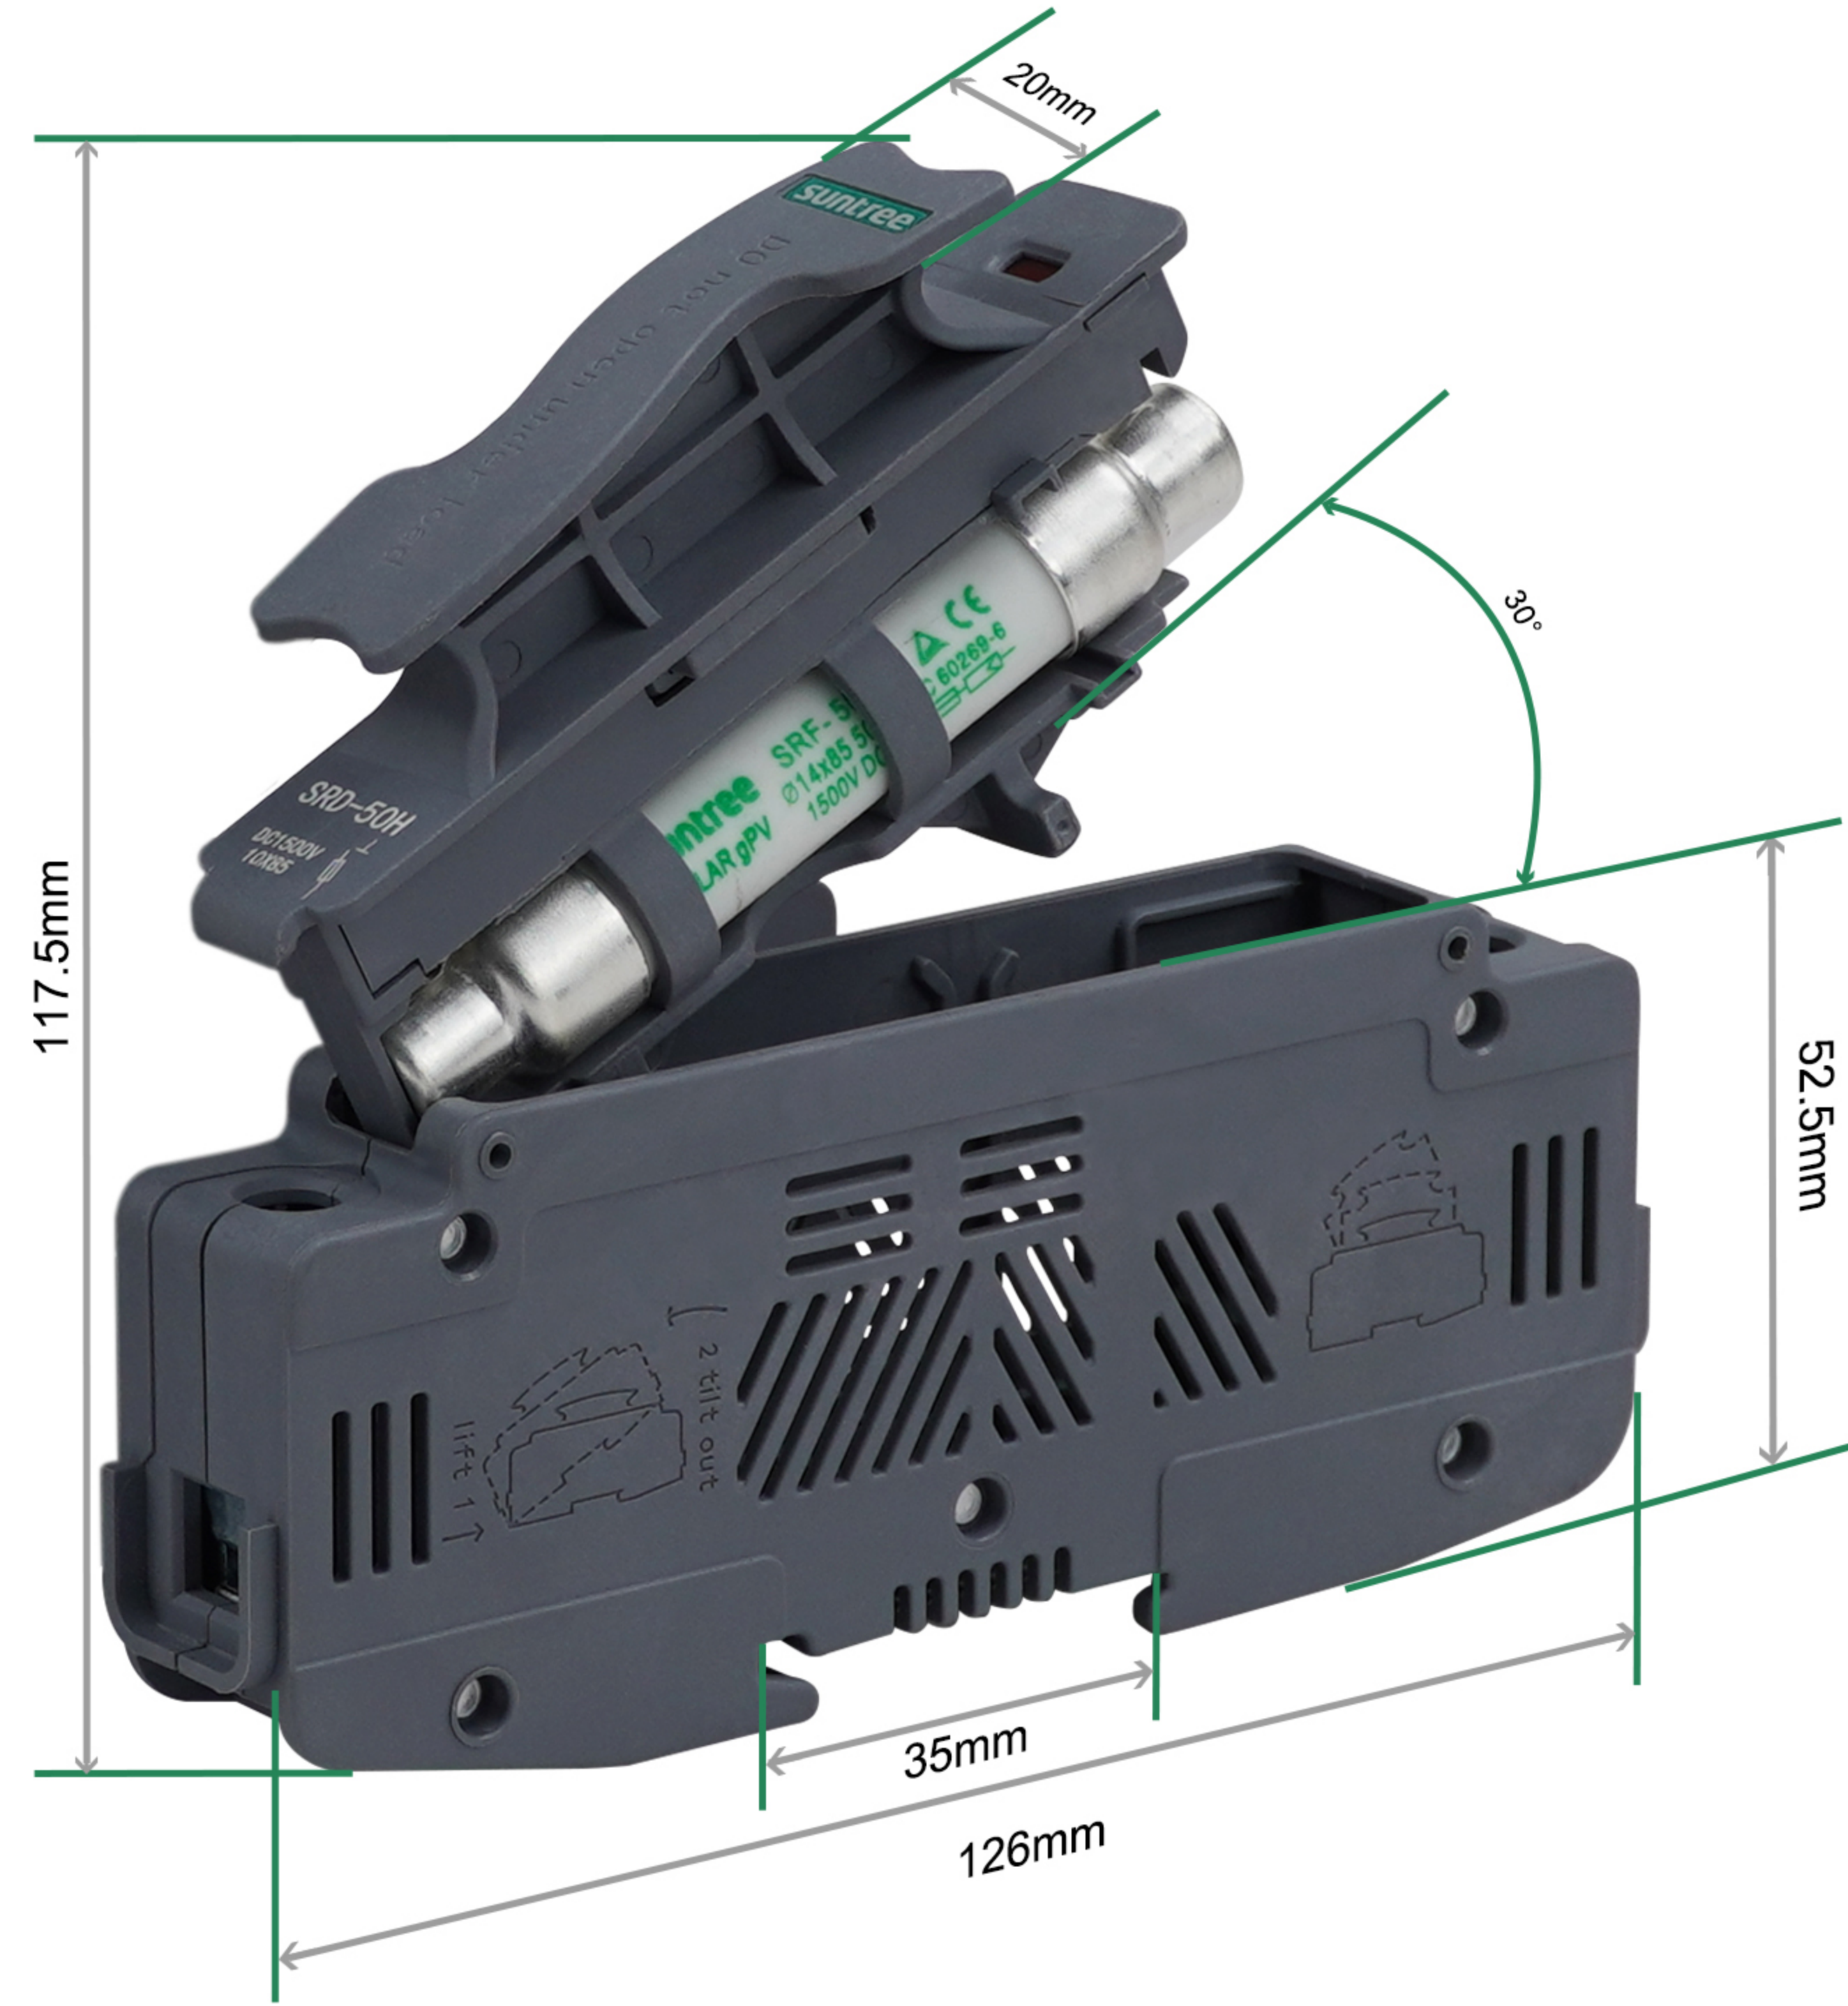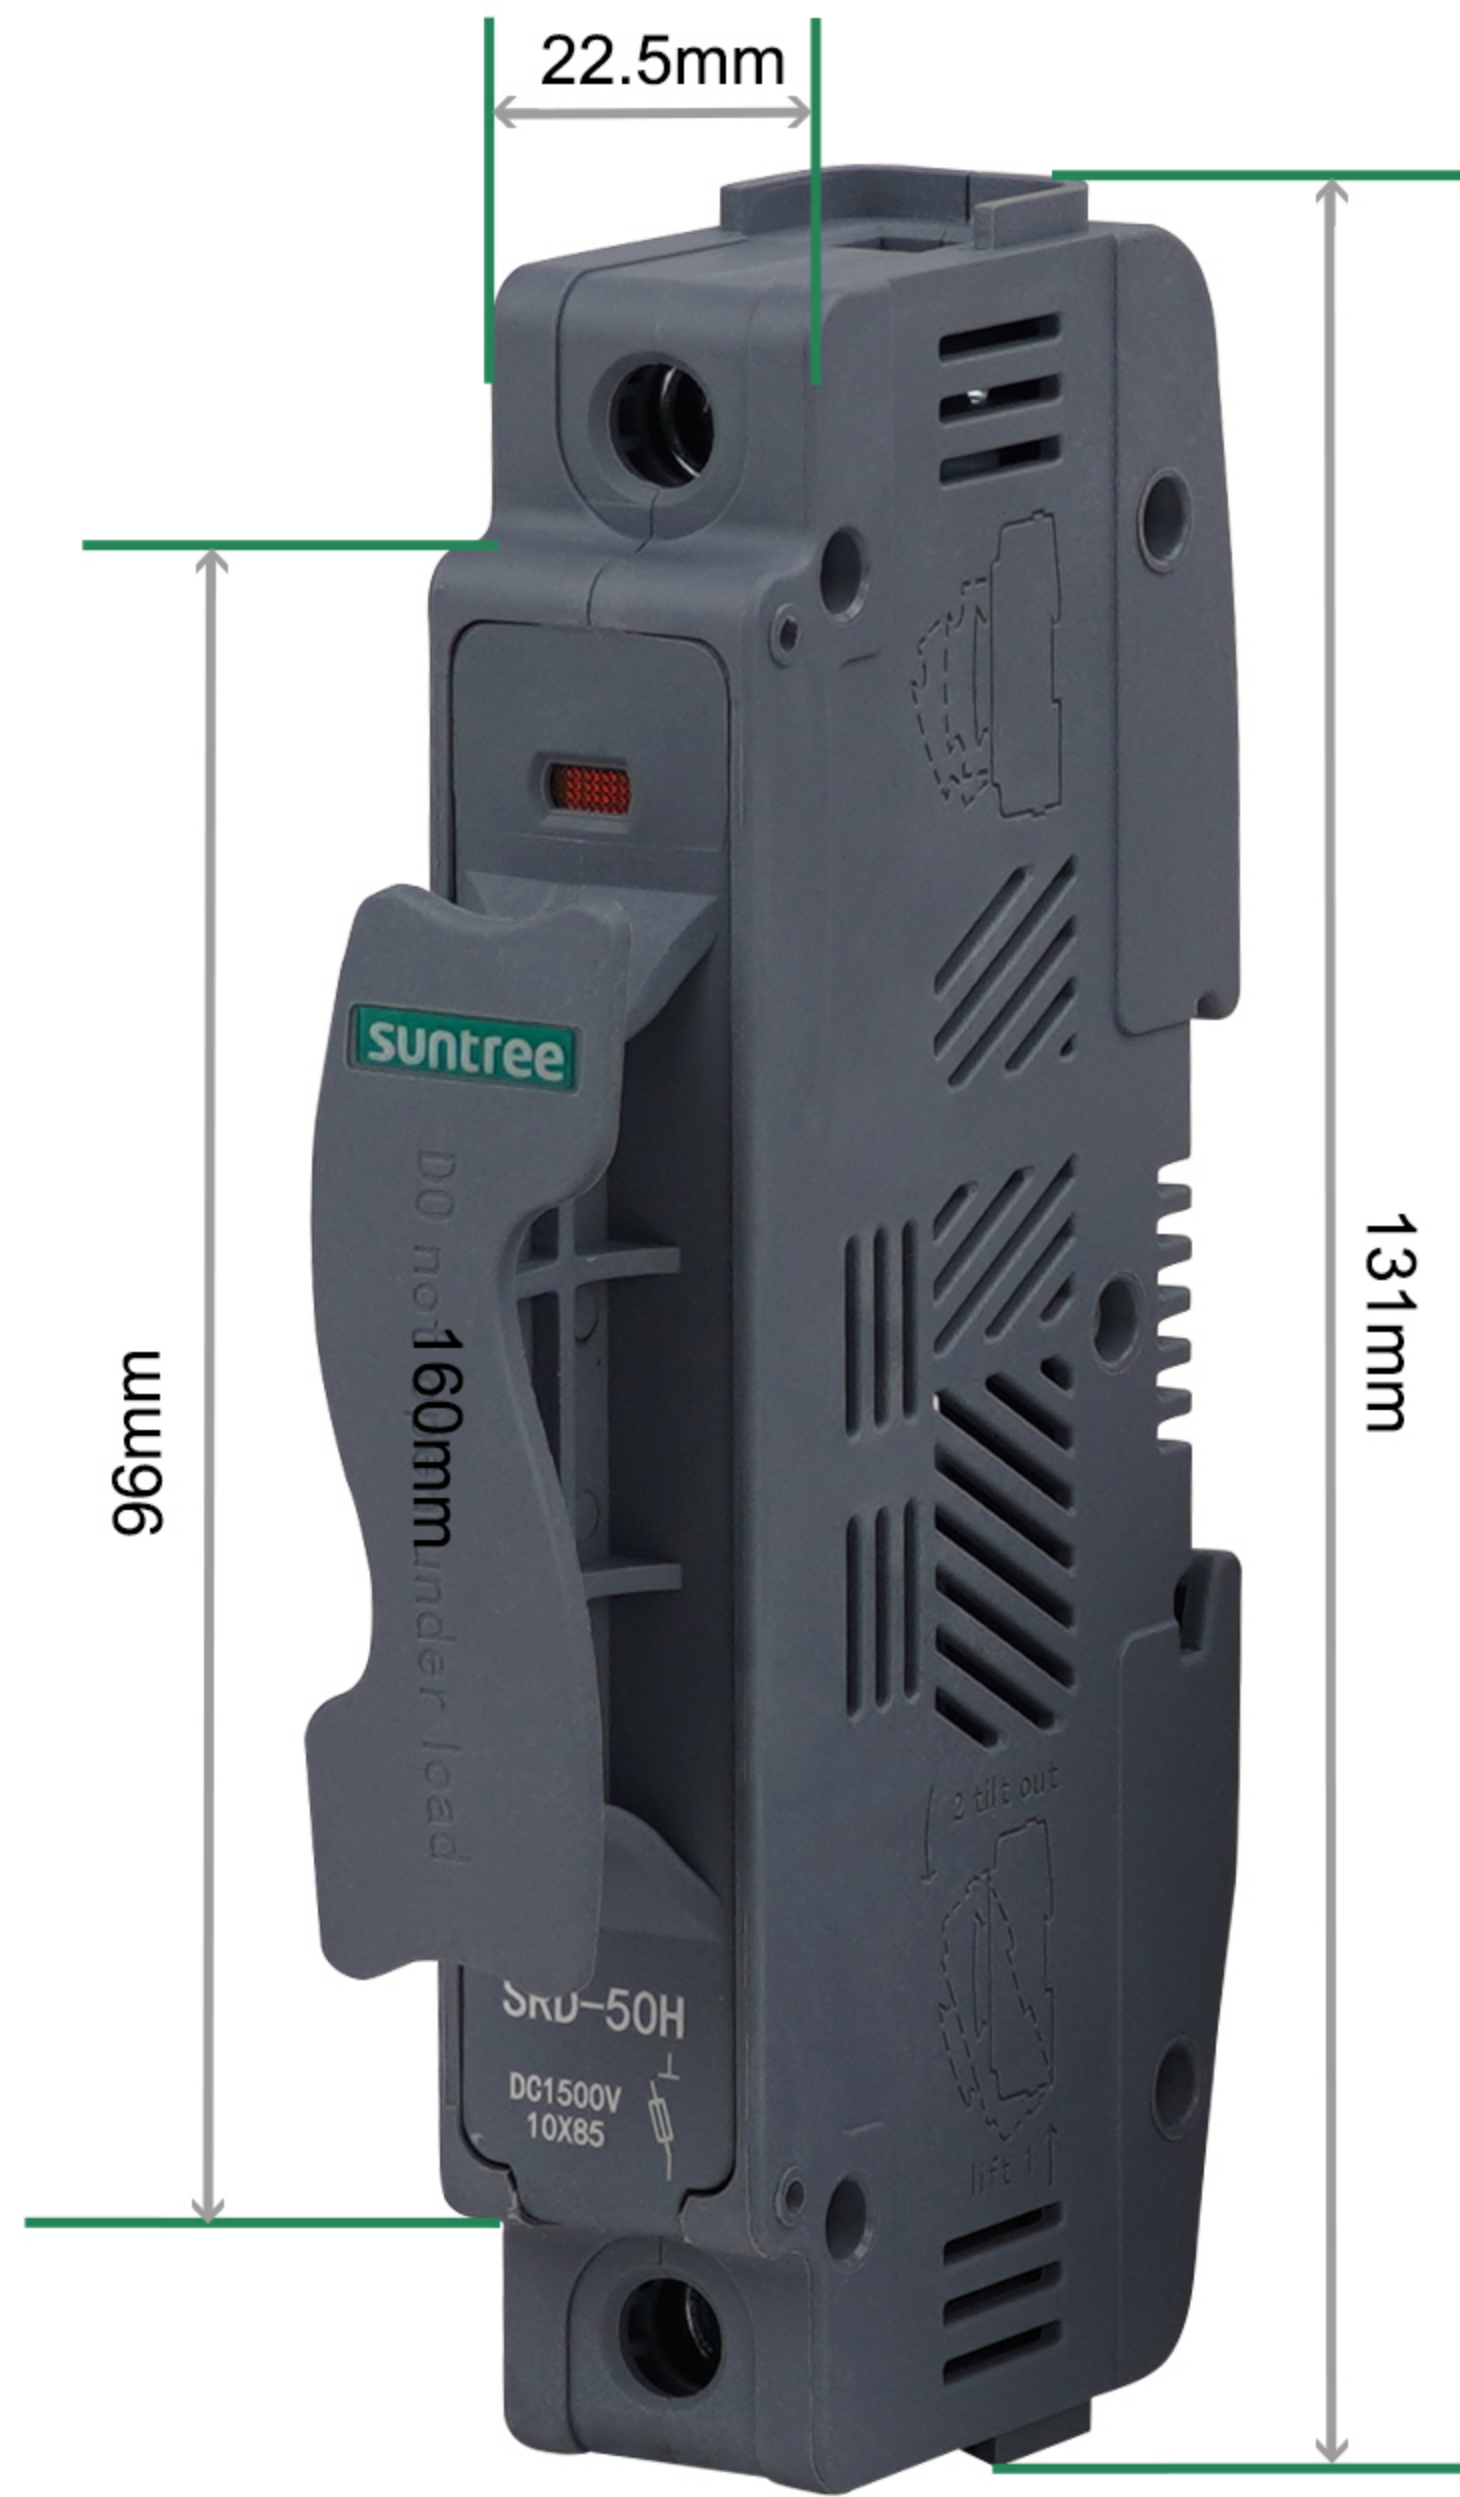









| WEIGHT REFERENCE                      |         |
|---------------------------------------|---------|
| Product model                         | SRD-50H |
| N.W.                                  | 0.12KG  |
| QTY/box                               | 10PCS   |
| G.W./box                              | 1.2KG   |
| QTY/Carton                            | 90PCS   |
| Weight of one Carton                  | 10.8KG  |
| This parameter is for reference only. |         |





### Inner box sticker

**Fuse holder**  
**Model:SRD – 50H**  
**Spec: 14 × 85**  
**Voltage : DC1500V**  
**Quantity: 10 Pcs**  
 MADE IN CHINA



### Outer box sticker

**Fuse holder**  
**Model:SRD – 50H**  
**Spec: 14 × 85**  
**Voltage : DC1500V**  
**Quantity: 90 Pcs**  
 MADE IN CHINA



When the product is put into storage, the label on the box can conveniently count and identify the quantity, which is convenient to find and improving work efficiency.



**suntree**  
human technology nature

// [www.chinasuntree.com](http://www.chinasuntree.com)